

ELECTRIC NEBULIZER

Sterihands basic version to be placed on a top

Technical features:

- Dimensions: 270x220x405H mm
- Power supply from mains 115 -230 V 50 Hz ➤ White plastic structure ➤ Hygiene speed 3-5 sec.
- Automatic sanitation activation by photocell
- Tank capacity 1L. With about 1L of product, about 350 nebulisers can be made. Access to the tanks from the back.
- Weight 5 Kg
- Compliant with the hygiene regulations provided for by Legislative Decree 155 dated 26/05/1997 (HACCP) and CE regulations.

Optional:

- Internal rechargeable battery - 12 V with battery charger
- Support with hinge for wall mounting
- Mobile support in plastic and stainless steel



ELECTRIC NEBULIZER


Steriplus

Technical features:

- Power supply from mains 115-230 V 50 Hz
- Wall mounting
- White plastic structure ➤ Hygiene speed 3-5 sec.
- Activation of automatic sanitization by photocell ➤ Tank capacity 2 liters.
- The front part must be removed to refill the tank.
- Weight 3.5 Kg
- Compliant with the hygiene regulations provided for by Legislative Decree 155 dated 26/05/1997 (HACCP) and EC regulations.

Optional:

- PRO waterproof version IP55.
- GAM version: tank loading by external filler cap.
- Mobile support in plastic and stainless steel

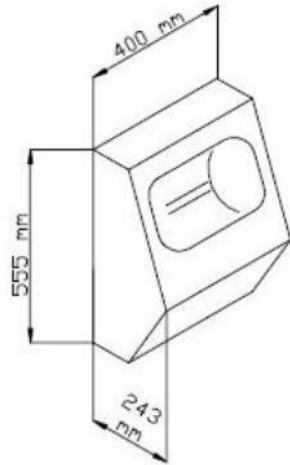

ELECTRIC NEBULIZER

Steriplus inox

Technical features:

- For dimensions see attached technical sheet
- Power supply from mains 115/220 V 50/60 Hz
- Prepared for wall mounting ➤ Satin finish stainless steel frame ➤ Hygienic speed 3-5 sec.
- Automatic sanitation activation by photocell
- Tank capacity 2 liters. With about one liter of product, about 350 nebulisers can be made. Weight 8.8 Kg
- Compliant with the hygiene regulations provided for by Legislative Decree 155 dated 26/05/1997 (HACCP) and EC regulations.

Optional:

- Internal rechargeable battery and battery charger to be connected to the mains.
- Stainless steel support:



ELECTRIC NEBULIZER

SanihandS inox

Technical features:

- For dimensions see attached technical sheet
- Power supply from 115/220 V 50/60 Hz network
- Prepared for wall mounting
- Works with the original liquid bottles. No possible spills of liquid on the ground during the loading of the liquid in the tank. ➤ Satin finish stainless steel frame ➤ Hygienic speed 3-5 sec.
- Automatic sanitization activation through photocell ➤ 2 types of delivery: continuous or timed.
- It sanitizes the whole arm in a simple and effective way.
- Weight 7.5 Kg
- Compliant with the hygiene regulations provided for by Legislative Decree 155 dated 26/05/1997 (HACCP) and EC regulations.



ELECTRIC NEBULIZER

Steripower mini 500 inox

Technical features:

- Dimensions 188x103x203 H mm
- Power supply with internal rechargeable battery. The supply includes the battery charger. To carry out the recharge it is necessary to remove the battery from the nebulizer. Duration recharge approximately 6 weeks.
- Prepared for wall mounting
- Satin finish stainless steel structure
- Automatic sanitation activation by photocell
- 1L tank capacity. With about 1 L of product, about 100 nebulisers can be made.
- Amount of sprayed product adjustable to 0.5 to 5 ml. On-board controls for adjustment.
- Compliant with the hygiene regulations provided for by Legislative Decree 155 dated 26/05/1997 (HACCP) and EC regulations.

Optional:

- Internal rechargeable battery

STERIPOWER

With the Steripower hands-free disinfection device, patented all over the world, hand disinfection will become as comfortable for you as it has ever been.

Steripower in 10 points:

- Requires no maintenance
- Dosing: amount of individual application adjustable in 10 levels, from 0.5 ml to 5 ml
- Spacious cavity for the disinfection of both hands, without contact. The excess solution does not damage the covering surfaces.
- The current and battery operation allows freedom of positioning. Minimum battery life weeks.
- Optical warning signal in case of battery depletion
- Compatible with any disinfectant preparation on the market (0.5 and 1L bottles)
- Sensor: inserting the hands the sensor activates the casting with the application quantity assigned.
- Nebulisation zone: moistens both hands covering the entire surface. No nebulisation is generated (no aerosol vapour)
- Recovery bowl: excess flux is collected and locked up.
- DIN sleeves for the connection of the supplied battery charger.
- Optional: digital remote control not manoeuvrable,

To check the dosage used and the number of dispensations made.





ELECTRIC NEBULIZER

Steripower

Technical features:

- Dimensions 290x290x505 H mm
- Power supply with internal rechargeable battery. The supply includes the battery charger. To carry out the recharge it is necessary to remove the battery from the nebulizer. DIN connection on the body of the nebulizer. Duration recharge approximately 6 weeks.
- Prepared for wall mounting
- White plastic structure
- Automatic sanitation activation by photocell
- 1litre tank capacity. With about a liter of product, about 100 nebulisers can be made.
- Amount of sprayed product adjustable to 10 levels from 0.5 to 5 ml. On-board controls for adjustment.
- Compliant with the hygiene regulations provided for by Legislative Decree 155 dated 26/05/1997 (HACCP) and EC regulations.

Optional;

Non-modifiable external digital counter for the control of the set dosage and of the nebulisations emitted during the day so as to monitor the passage of people.